



H [m]

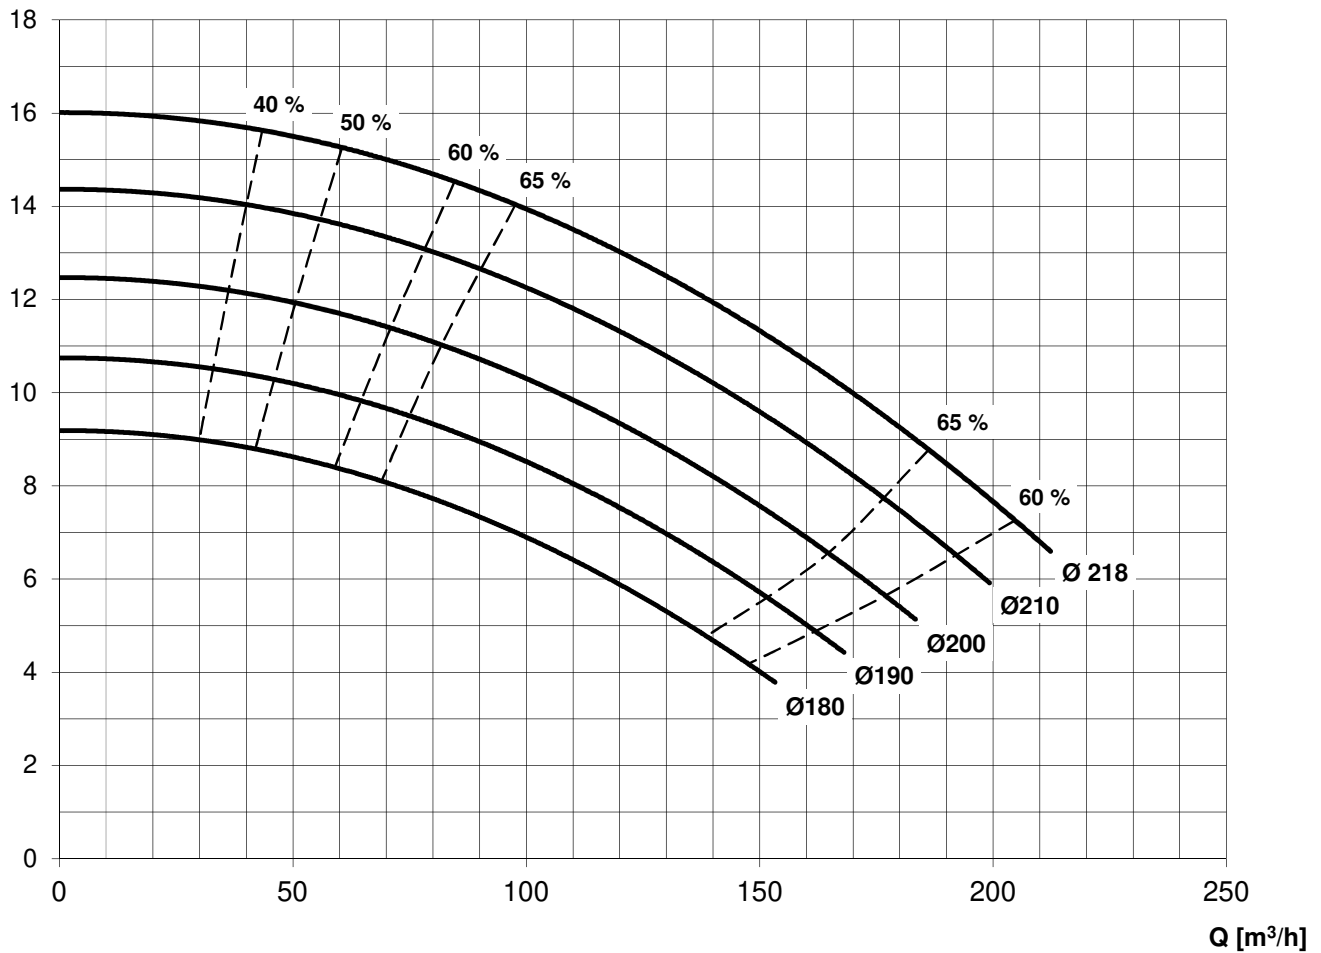

P [kW]

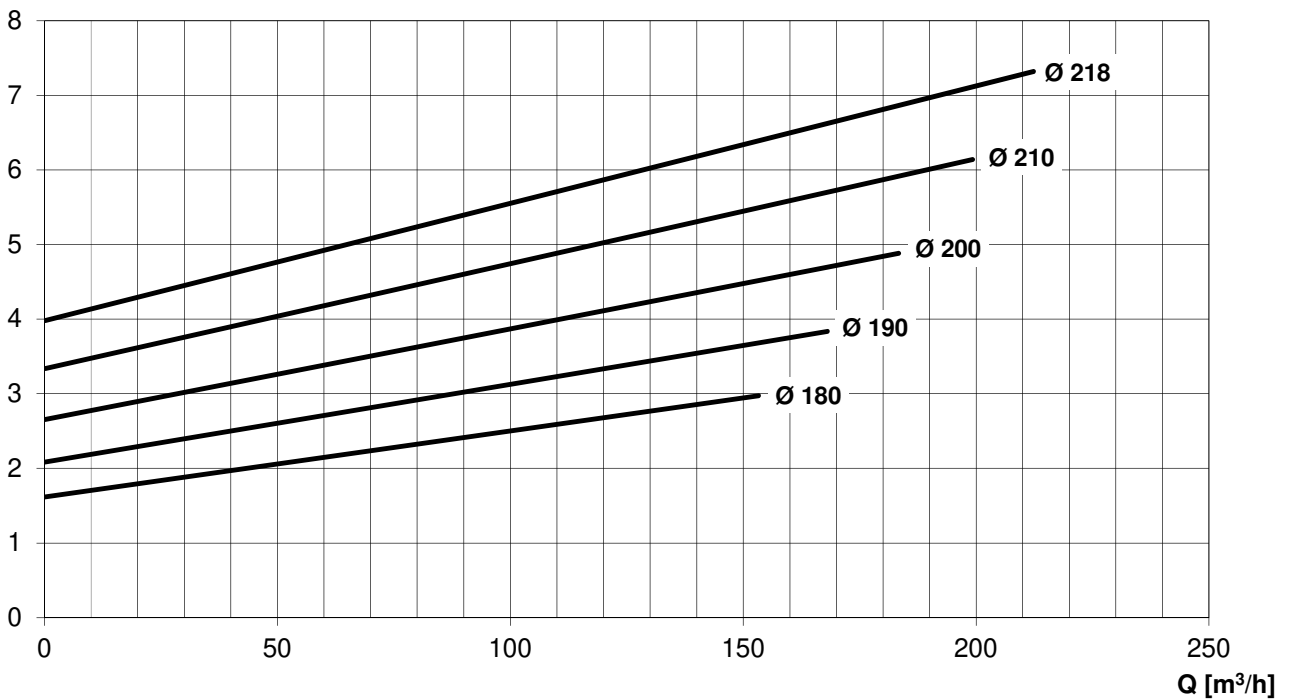



A tolerance of $\pm 5\%$ applies to all figures
Based on tests using 20°C water

name : Ra
date : 20.10.11

FP 1240

Inlet: DN 125
Outlet: DN 100

n = 1450 min⁻¹

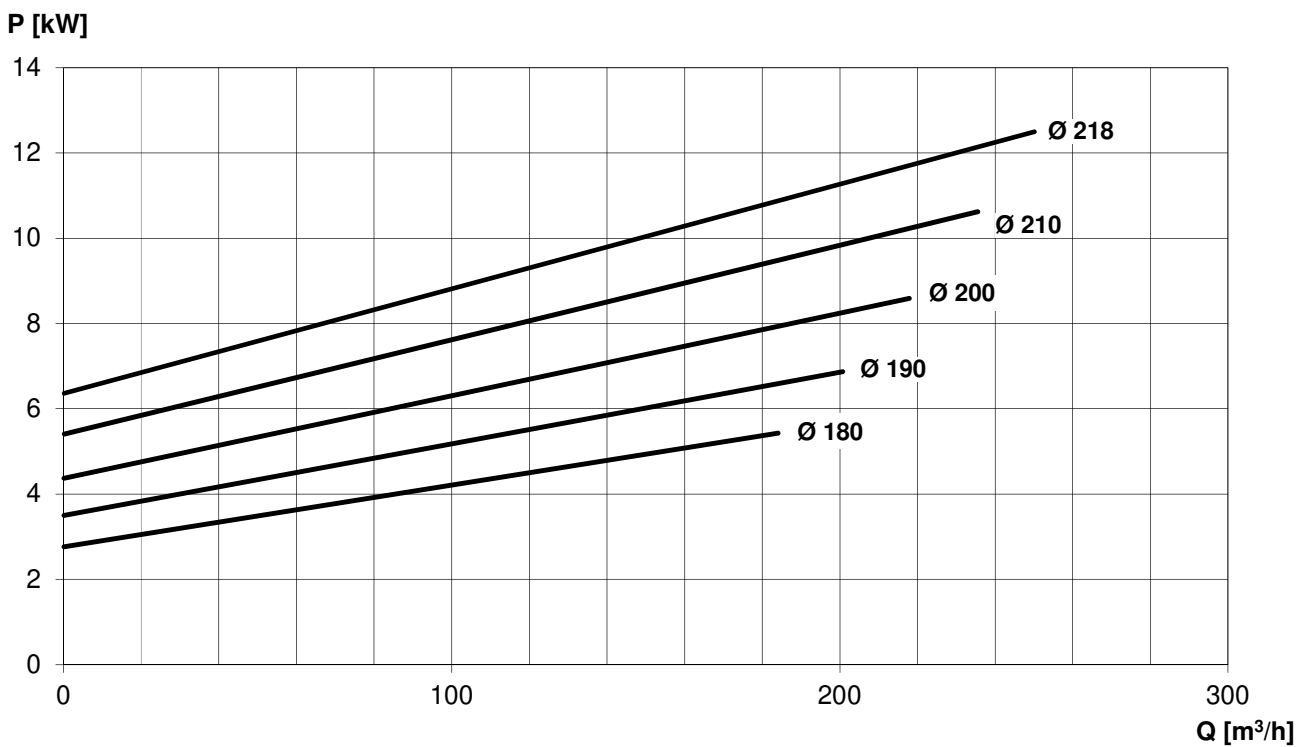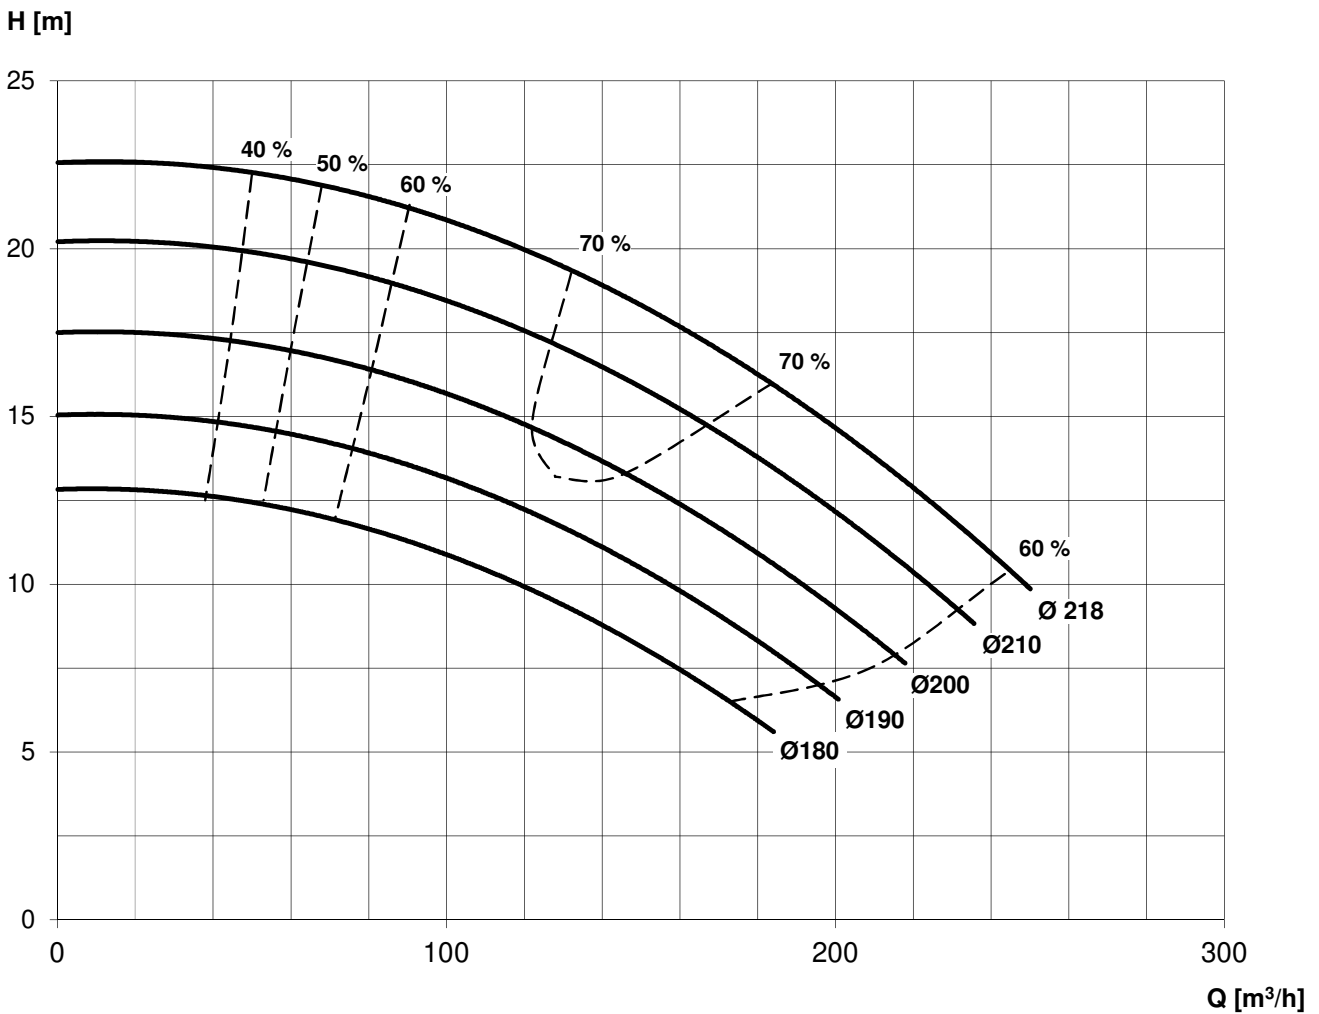



A tolerance of $\pm 5\%$ applies to all figures
Based on tests using 20°C water

name : Ra
date : 20.10.11

FP 1240

Inlet: DN 125
Outlet: DN 100

n = 1750 min⁻¹

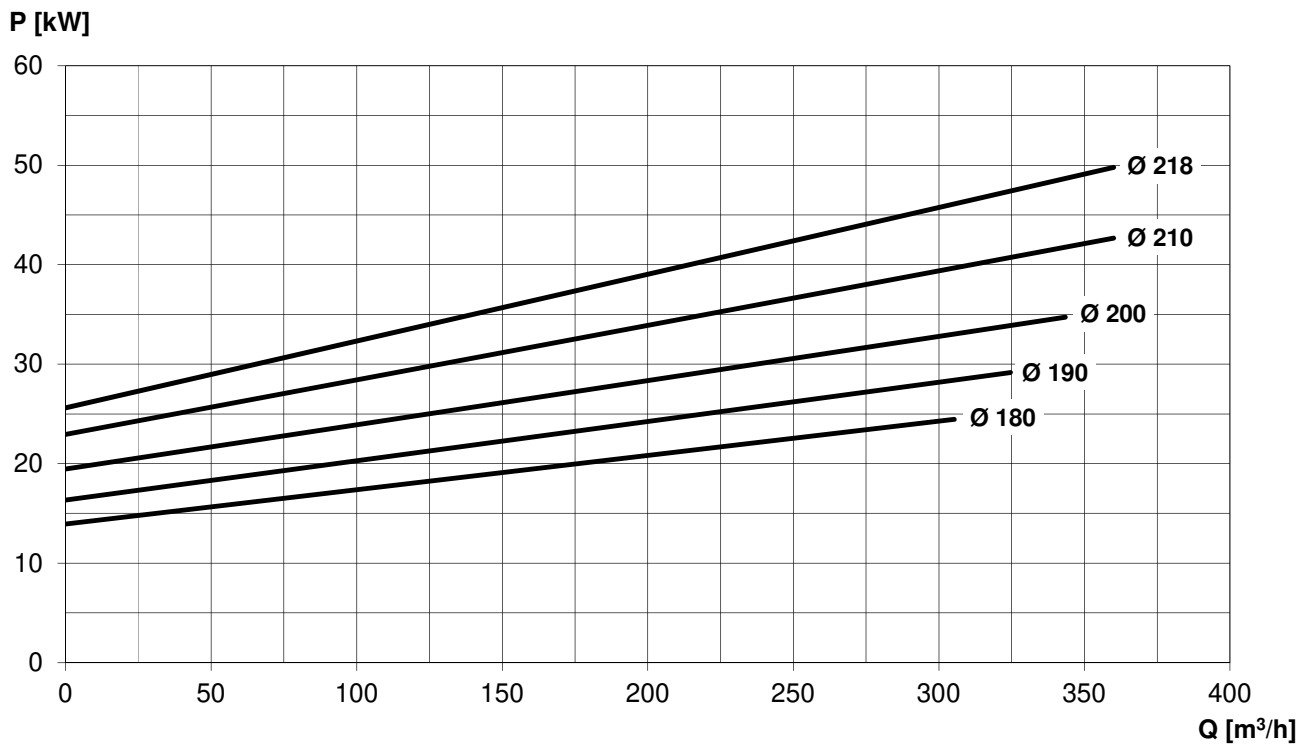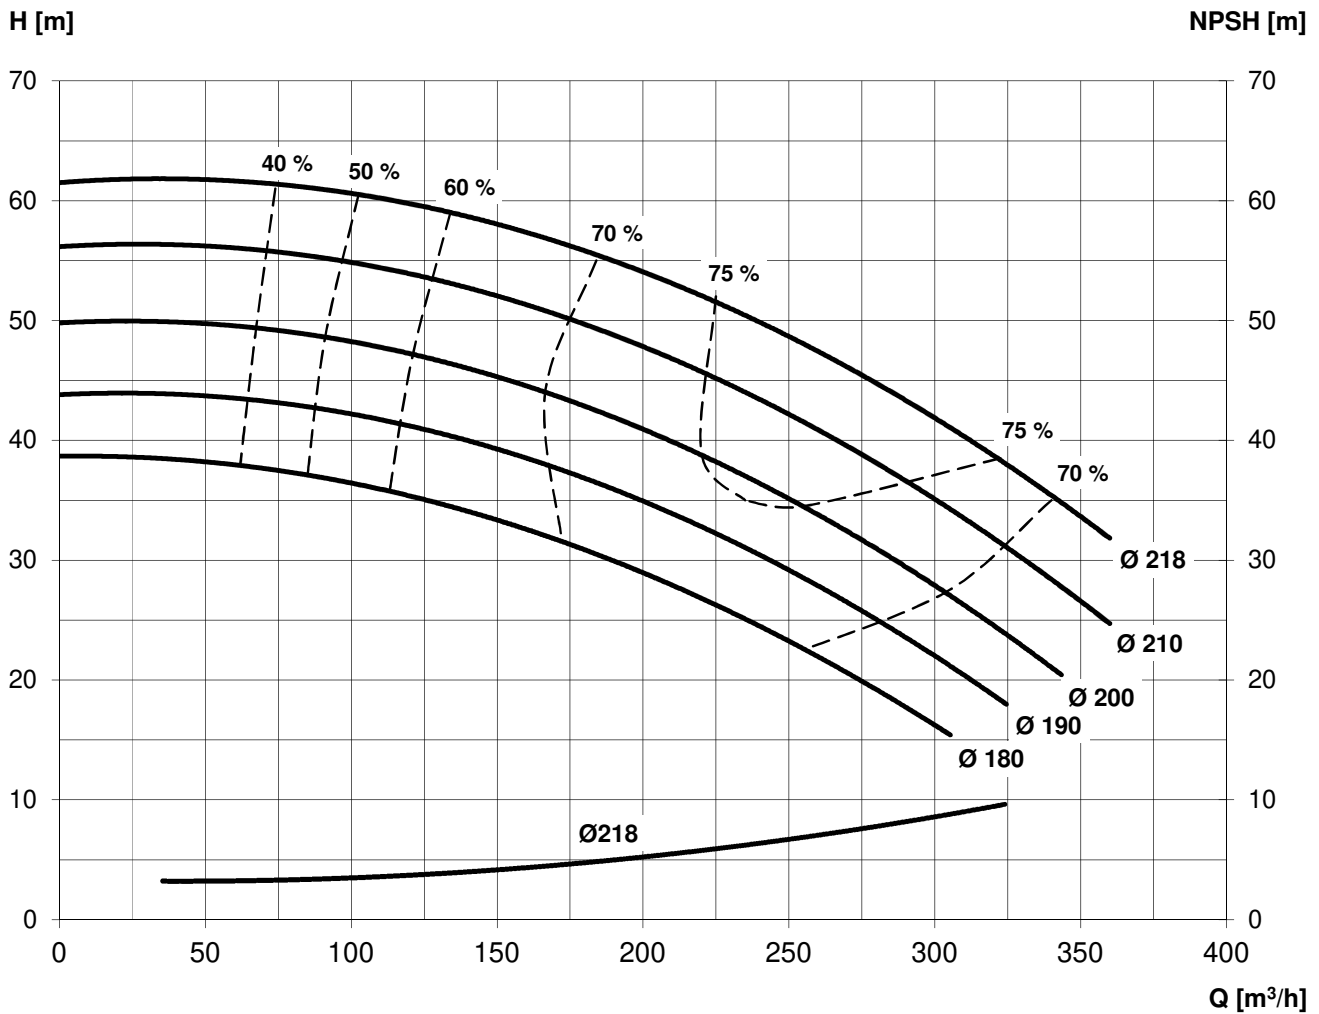



A tolerance of $\pm 5\%$ applies to all figures
Based on tests using 20°C water

name : Ra
date : 20.10.11

FP 1240

Inlet: DN 125
Outlet: DN 100

n = 2900 min⁻¹

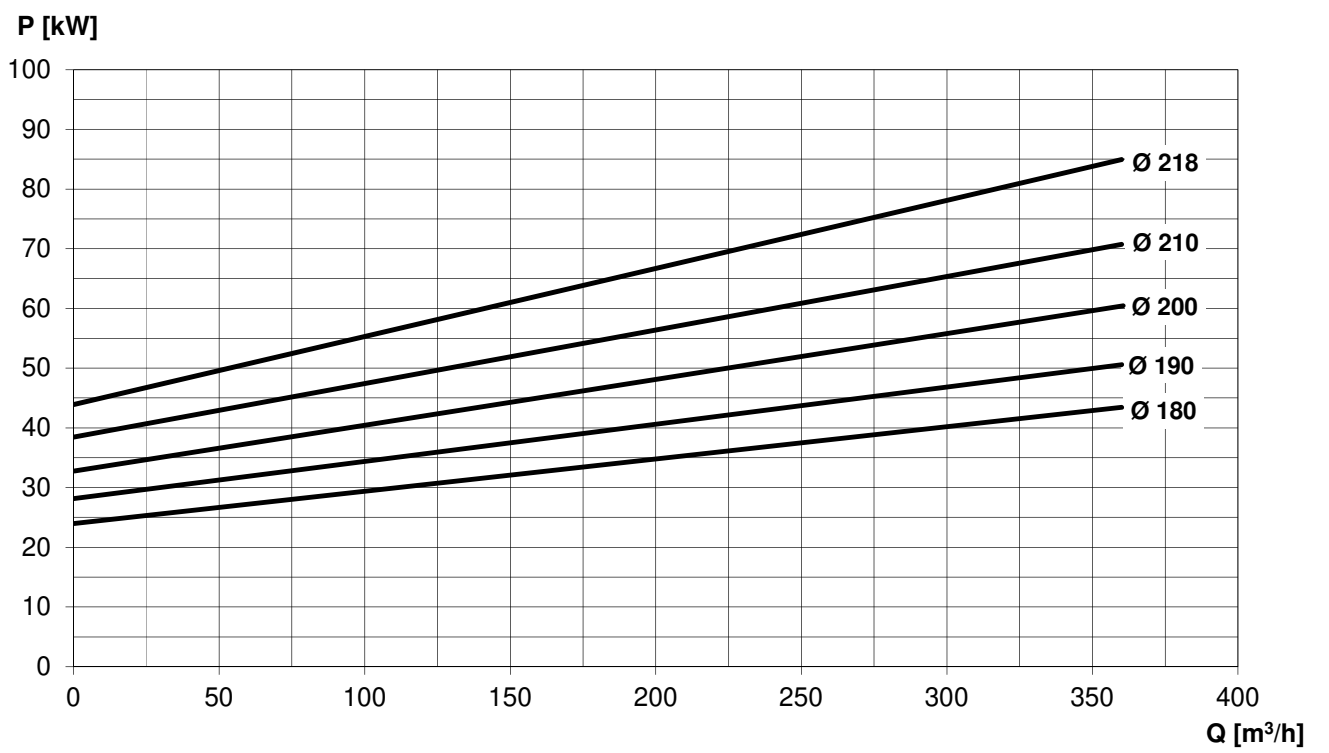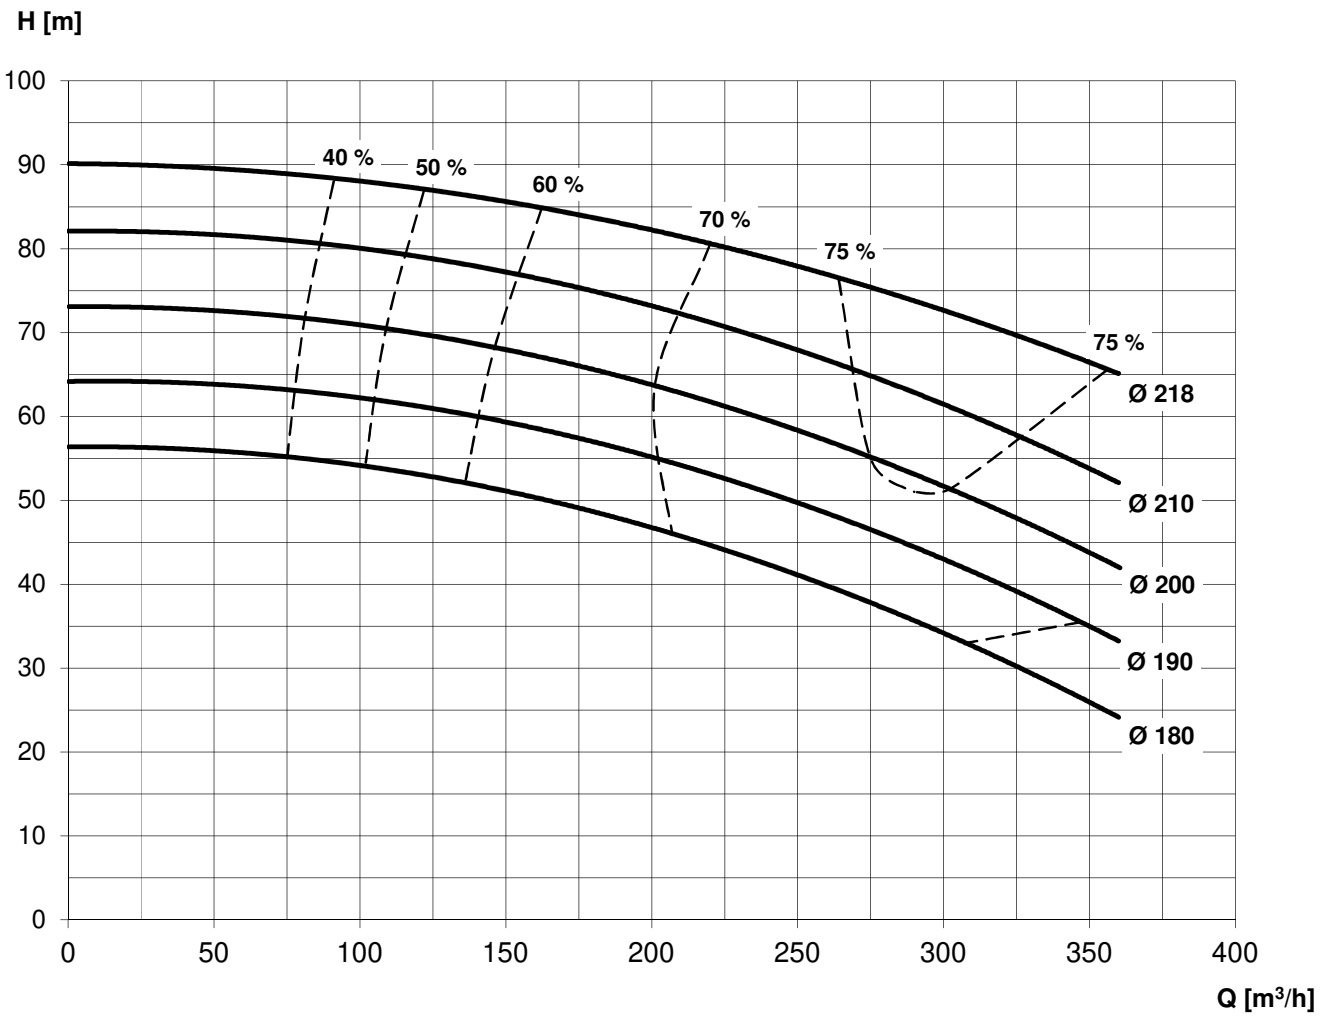

A tolerance of ± 5% applies to all figures Based on tests using 20°C water	name : Ra	FP 1240
	date : 20.10.11	
Inlet: DN 125 Outlet: DN 100	n = 3500 min⁻¹	