
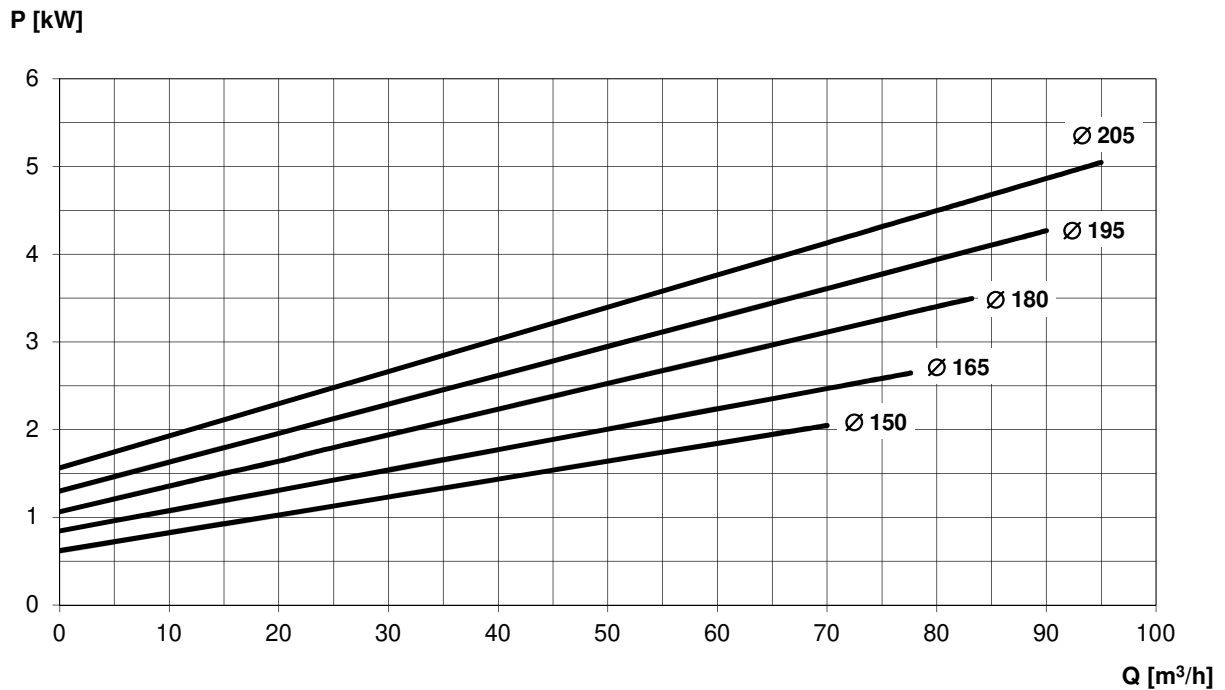


| | | |
|--|----------------------------------|------------------|
| A tolerance of $\pm 5\%$ applies to all figures Based on tests using 20°C water | name : Tho date : 21.01.10 | <h2>FP 3541</h2> |
| Inlet: DN 80 Outlet: DN 65 | n = 1450 min⁻¹ | |

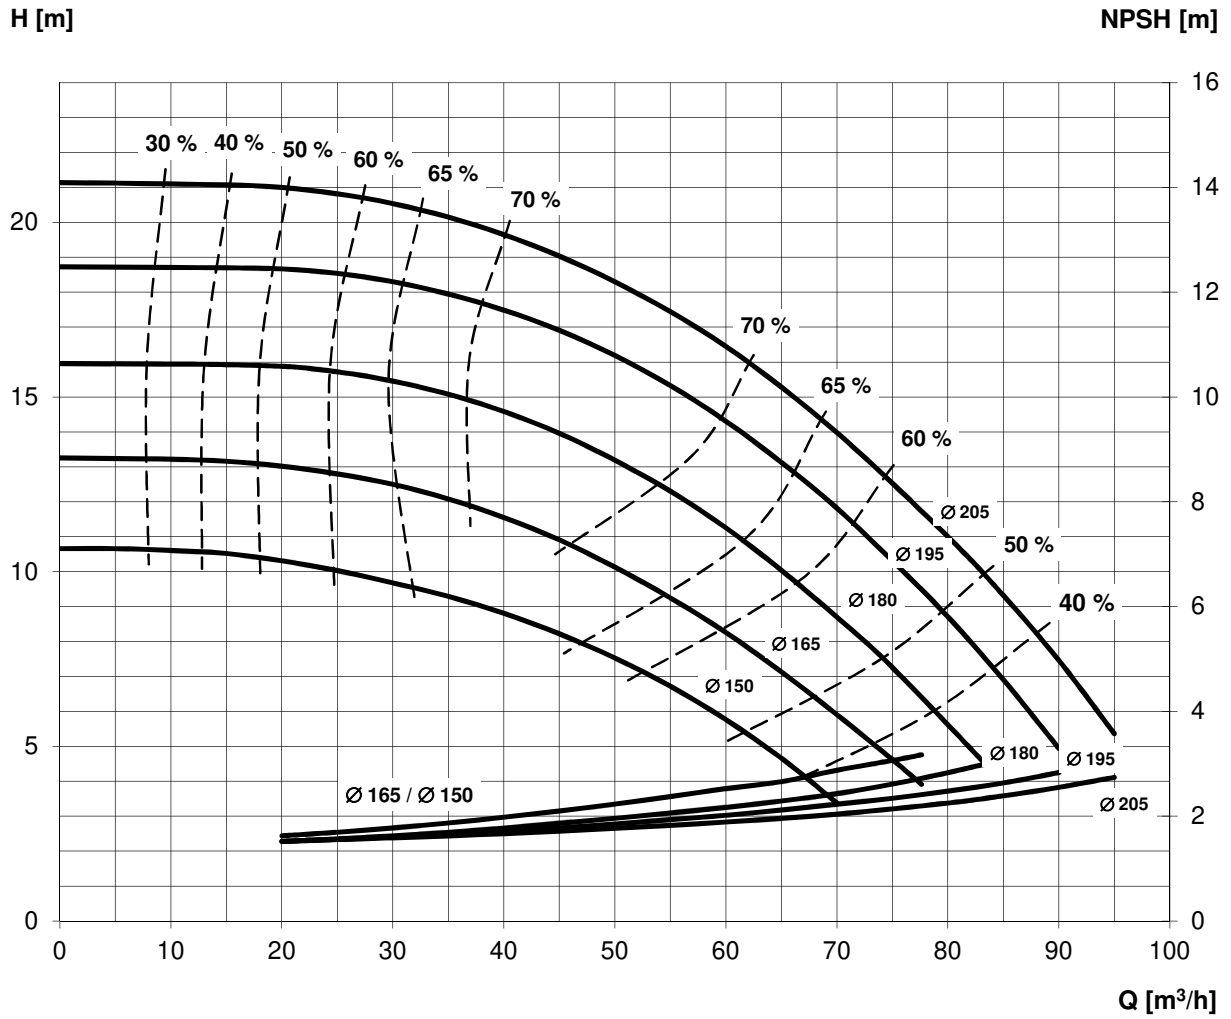



A tolerance of $\pm 5\%$ applies to all figures
 Based on tests using 20°C water

name : Tho
 date : 21.01.10



FP 3541

Inlet: DN 80
Outlet: DN 65

n = 1750 min⁻¹

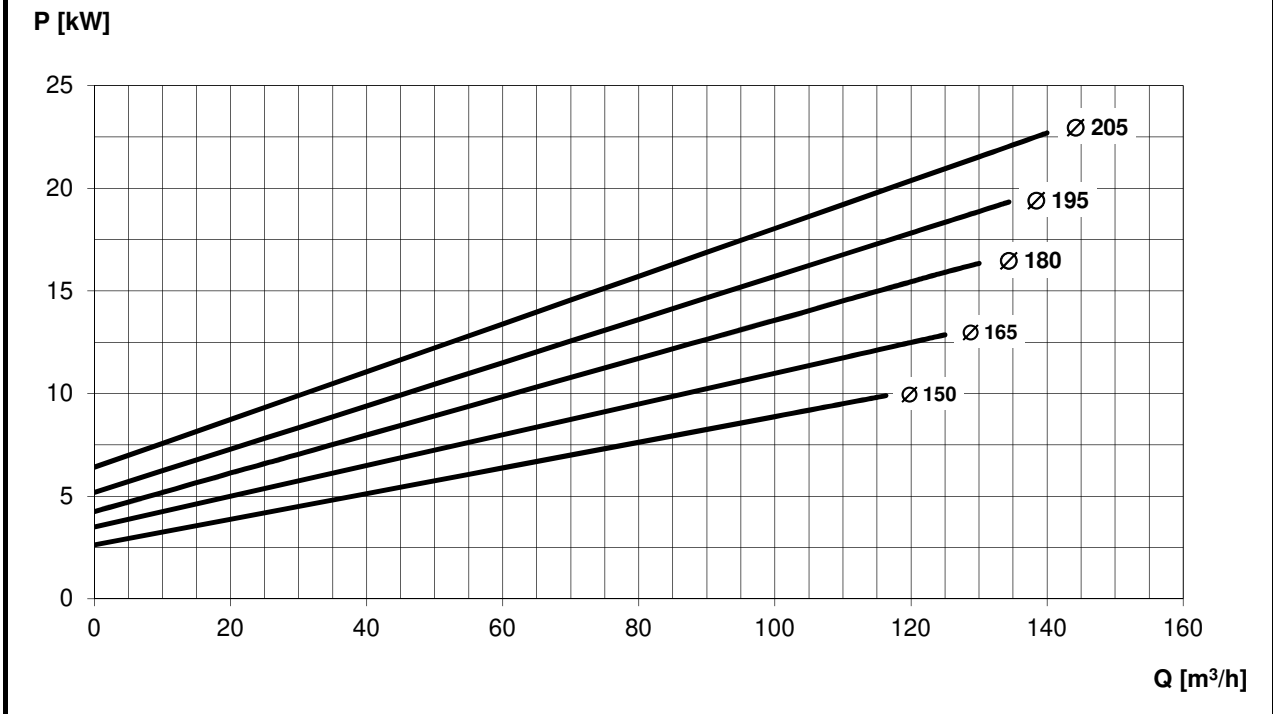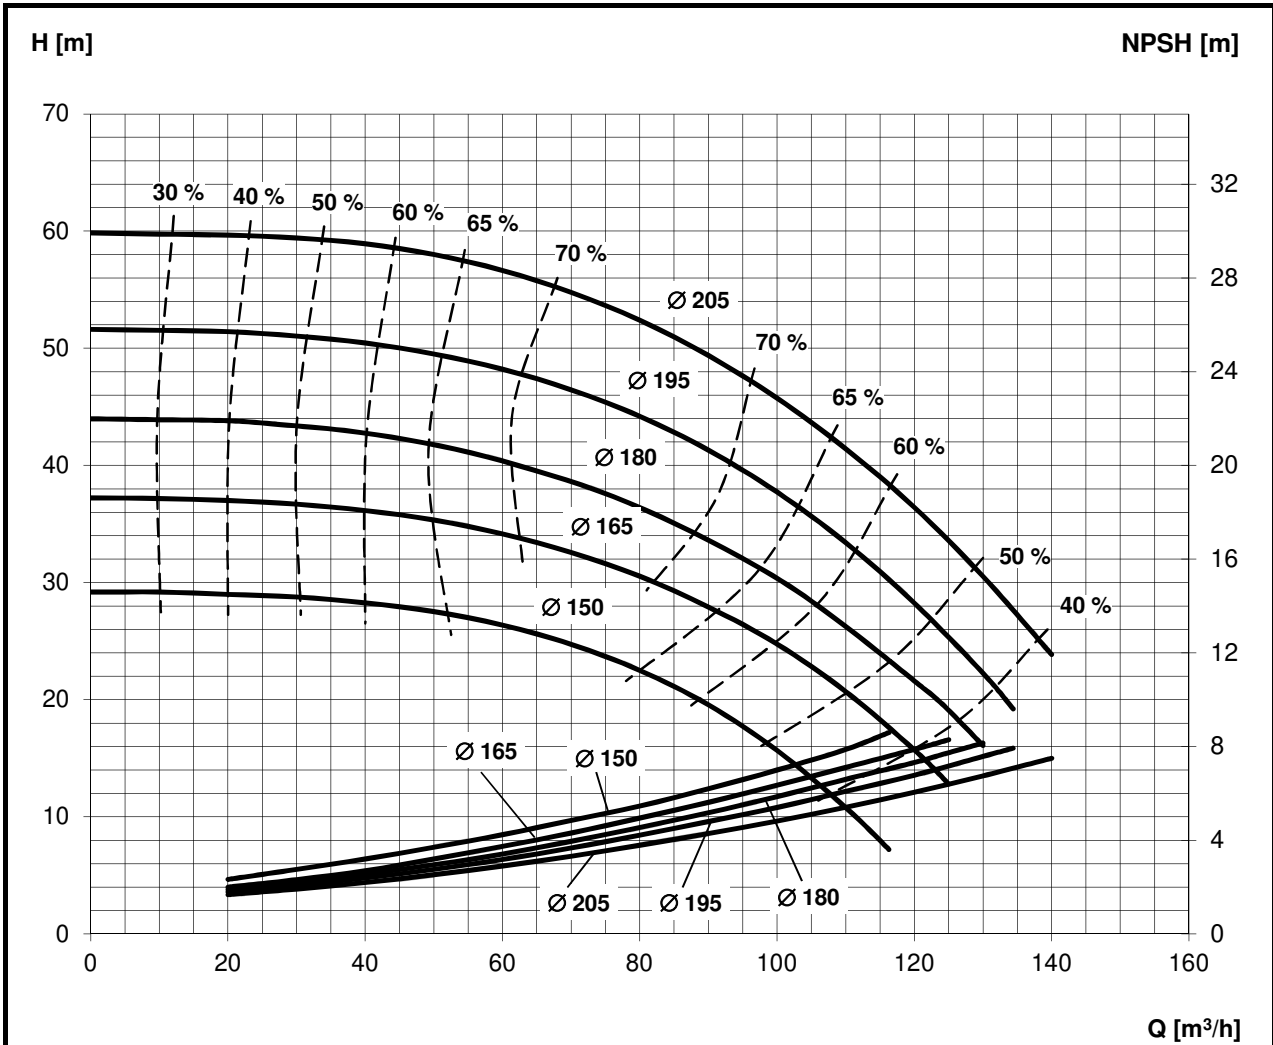

| | | |
|--|----------------------------------|----------------|
| A tolerance of $\pm 5\%$ applies to all figures Based on tests using 20°C water | name : Tho | FP 3542 |
| | date : 21.01.10 | |
| Inlet: DN 80 Outlet: DN 65 | n = 2900 min⁻¹ | |

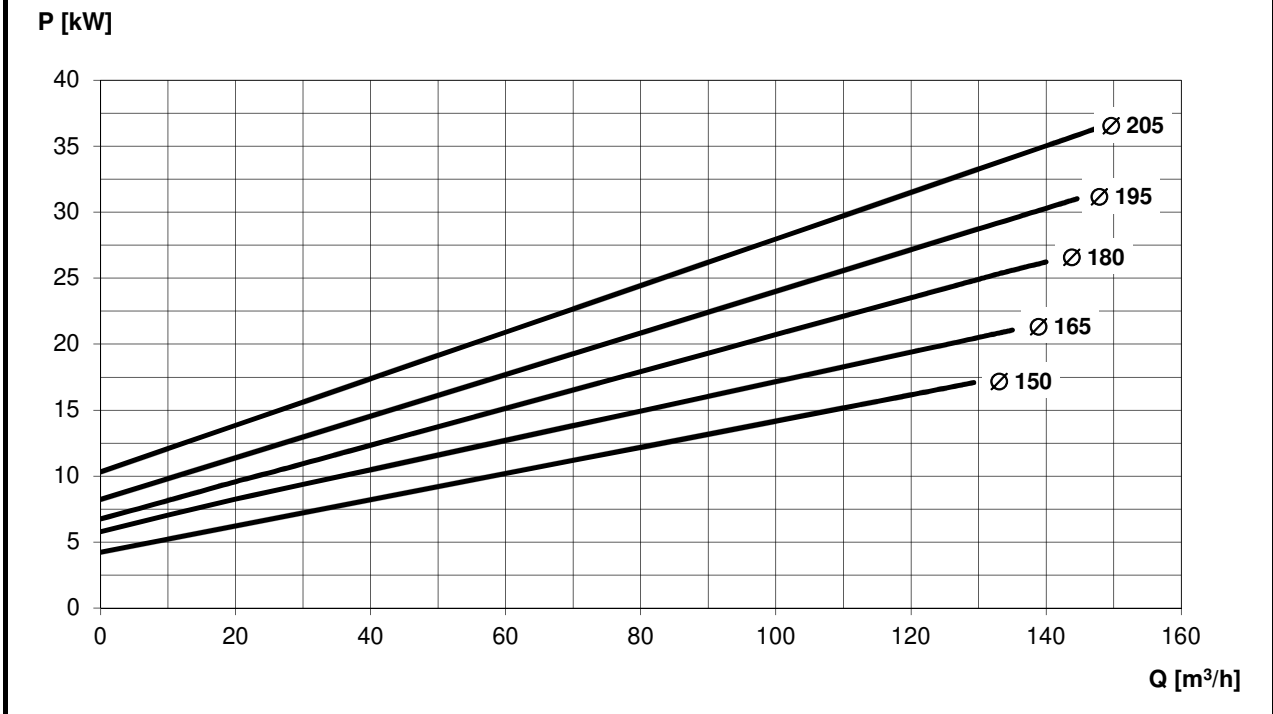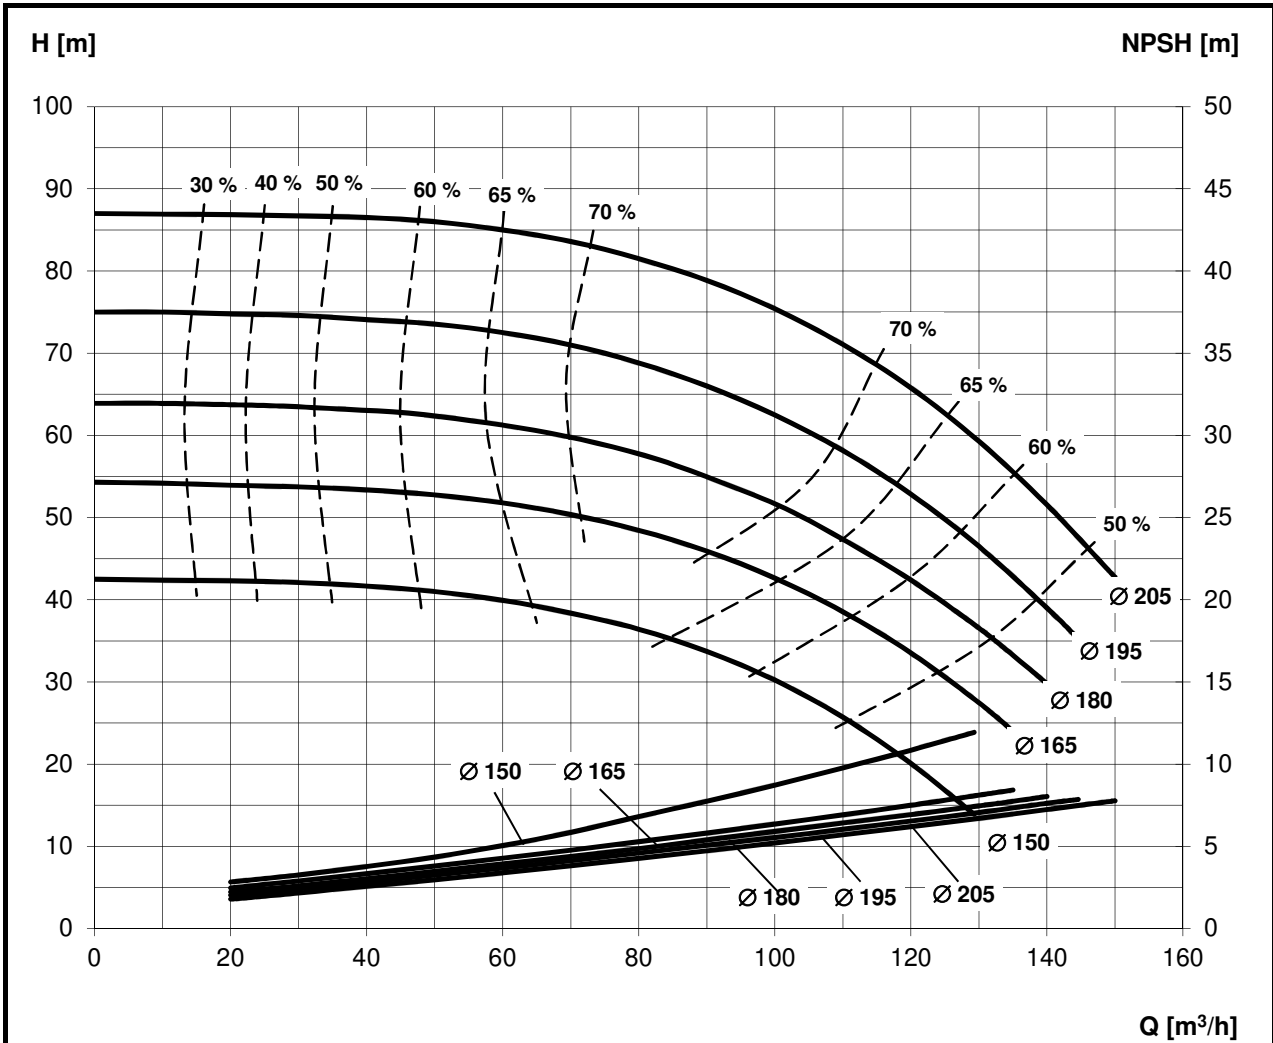

| | | |
|--|---|----------------|
| A tolerance of $\pm 5\%$ applies to all figures Based on tests using 20°C water | name : Tho date : 21.01.10 | FP 3542 |
| Inlet: DN 80 Outlet: DN 65 | $n = 3500 \text{ min}^{-1}$ | |